

ATLAS

Wheel Excavator 220W

STABLE. STRONG. STEADY.

220W



22,0 - 22,6 t



125 kW (170 hp)



0,75 - 1,3 m³



ENGINE

Power rating acc. to ISO 9249	125 kW (170 hp)	Displacement	6700 cm ³	Battery	2 x 12 V / 100 Ah
RPM	2000/min	Number of cylinders	6	Generator	24 V / 70 Ah
Make/model	Cummins/QSB 6.7	Cooling system	water cooled	Starter	24 V / 3,2 kW
Desig.	Turbocharger/charge air cooling	Air filter	dry air filter		

HYDRAULIC SYSTEM

• Load limit controlled high-performance piston pump	• Suction valve for all work functions	• Pipe break protection valves for lifting cylinders
• Dual circuit hydraulic system	• Load retaining and fine lowering valves in lifting circuit	• 2 additional circuits for more consumer loads possible
• Standard 7 consumer loads in one valve block	• Pump flow control	• Max. oil flow400 l/min
• Sensitive, proportional, independent control	• Proportional grab/grab rotating function	• Operating pressure max 340 (370)* bar
• Primary and secondary protection against overload	• Fuel efficient flow-on-demand control	• Operating modes: 3 preprogrammed modes (Fine, Eco, Power)

SWING ASSEMBLY

• Swing motor:	Axial piston motor with priority valve	• Max. swing speed 11/min
• Swing gear:	Planetary transmission	• Swing torque 63,2 kNm
• Swing brake:	Automatically controlled multi-disc brake	

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive drive and cruise control	• Tractive force..... 91,8 kN
• Power shift gear	• Max. speed..... 20 km/h	• Gradeability max.55 %
• Double-acting brake valve	• Off-road speed..... 5 km/h	• Dual circuit brake.....multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed.....1 km/h	• Parking brake.....multi-disc

UNDERCARRIAGE

• 40 ton special excavator axles	• 8 tires (twins) PR 16 10.00 - 20
• Steering axle with automatic oscillating axle locking	

FILL CAPACITIES

• Fuel tank 389 Liter	• Engine oil..... 20 Liter	• Hydraulic system.....290 Liter
• Cooling system 42 Liter	• Hydraulic tank..... 216 Liter	

DRIVER'S CAB

• Meets latest safety standards	CONTROL:	CLIMATE CONTROL:
• Extra large entry zone	• Ergonomic joysticks with proportional slide control	• Air conditioning equipped as standard
• Spacious leg room	• Slim, height- and angle adjustable steering column	• Excellent air distribution through optimally arranged nozzles
• Excellent circumferential visibility	• Indicators, controls and operating switches are clearly arranged	
• Preparation for radio installation with mute function		SOUND LEVELS:
	MONITORING:	• ISO 6396 (LpA) in driver's cab.....74 dB(A)
DRIVER'S SEAT:	• Operating data display screen	• 2000/14 EG (LwA) ambience level..103dB(A)
• Air-cushioned comfort seat (optional seat heating)	• Automatic system for monitoring, warning and storage of data	
• Arm rests and lumbar support		
• Seat adjustable separately from console		

OPERATING WEIGHTS

ADJUSTABLE BOOM

Base arm 1,95 m (C23.41), Boom 4,23 m (C25.46), Stick 2,65 m (D21.33)

Support and dozer blade/ outriggers

22,6 t

* Power boost switch Operating weights for road travel with a driver, completely filled and 1,0 t attachment

EQUIPMENT

BASIC UNIT ATLAS 220W

STANDARD BASIC EQUIPMENT:		• Seat can be adjusted separately from console
• Wheel excavator 220W, support and dozer blade on rigid axle, 2x outrigger support on steering axle, 2 lifting cylinders (A23.33)	Engine:	• Rear view security camera with 5 inch LCD-colour monitor
	• Automatic idling system	• Heat absorbing glass, tinted windows
	• Diesel prefilter	• Automotive drive and cruise control
BOOM:		
• Adjustable boom consisting of base arm 1,95 m (C23.41) with adjustable cylinder and boom 4,23 m (C25.46) with stick cylinder	• Engine monitoring	• Operating data display screen
		• Ready for electric cooling box
STICK:	Hydraulic system:	• Different options for storage, compartment for documents
• Stick 2,65 m (D21.33) for adjustable boom	• Proportional grab and grab rotating function	• Bottle holder
	• Accumulator for emergency lowering of boom system	
BUCKET TIPPING CYLINDER:	• Pipe-break protection valves for lifting cylinders	SUPERSTRUCTURE:
• Bucket tipping cylinder with bucket linkage (F25.1A)	• Max. load-limit control	• Fold-away condenser
	• Cylinder end position damping	• Spacious and lockable storage space in superstructure
EQUIPMENT:	Cab:	UNDERCARRIAGE:
• Joint bearings in stick and bucket cylinders	• Air conditioning	• Power shift transmission
• Combined lubricating points for swing bearing and arm equipment	• Preparation for radio installation with mute function	• Wet disc brakes
	• Slim, height and angle adjustable steering column	• Toolbox in undercarriage

ADDITIONAL EQUIPMENT

Engine:	Equipment:	• Alarm-signal while driving
• Refueling pump	• Automatically controlled and monitored electric central lubrication system	• Beacon light
• Engine speed adjustment via potentiometer	• Second toolbox in undercarriage	• GPS/GSM Telemetriebox, for monitoring of operating data, fuel consumption, location
• Auxiliary heating	• Transport cover of bucket from 1000mm to 1300mm	• Radio/CD/MP3, front AUX in, USB
• Cold start assistance	• Traction motor guard	• Electric cooling box
		• Working lights, Xenon-version
Hydraulic system:	Cab:	• Head rest
• Hydraulic kit, to operate front and rear supports separately	• Cab protection guard	• Proportional control of supports by slide in joystick
• Hydraulic kit, to operate supports per axle separately	• Heated driver's seat	
• Biodegradable oil	• Cab elevation	Further special equipment: see price list

ATTACHMENTS (SELECTION)

	Bucket F63.15	Bucket* F63.26	Bucket* F63.27	Bucket* F63.28	Bucket F63.29	Trench bucket F63.35
Capacity SAE	0,75 m ³	0,83 m ³	0,93 m ³	1,14 m ³	1,34 m ³	1,14 m ³
Cutting width	850 mm	1000 mm	1100 mm	1300 mm	1500 mm	1300 mm

* A German road authorization under §70 StVZO says only buckets from 1000 mm to 1300 mm cutting width are possible!

Lifting capacities


Adjustable boom: Base arm C23.41, boom 4,23 m (C25.46) with stick 2,65 m (D21.33). Max. reach 10,25 m

	3,0 m		4,0 m		5,0 m		5,5 m		6,0 m		6,5 m		7,0 m		7,5 m		8,0 m		8,5 m	
	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE	LENGTHWISE	CROSSWISE
Height																				
9,0 m	supported	-	-	7714	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	unsupported	-	-	7714	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7,5 m	supported	-	-	-	6904	6904	6904	6904	6696	6696	5074	5074	-	-	-	-	-	-	-	-
	unsupported	-	-	-	6904	6084*	6875*	5277*	5981*	4550*	5074	3933*	-	-	-	-	-	-	-	-
6,0 m	supported	-	-	6835	6835	7295	7295	7108	6958	6958	6820	6759*	6610	6034*	5469	5332*	-	-	-	-
	unsupported	-	-	6835	6835	7295	6033*	6831*	5275*	6011*	4664*	5343*	4122*	4715*	3600*	4146*	3149*	-	-	-
4,5 m	supported	10337	10337	10261	10261	8653	8653	8100	8100	7589	7511*	7159	6684*	6865	6006	6625	5409*	6053	4814*	-
	unsupported	10337	10337	10261	8020*	7691*	5895*	6705*	5181*	5926*	4608*	530*0	4135*	4777*	3676*	4224*	3226*	3741*	2838*	-
3,0 m	supported	-	-	12415	12415	10063	9650	9087	8374*	8381	7390*	7812	6600*	7346	5957*	6997	5396*	6743	4810*	5820
	unsupported	-	-	10405*	7751*	7506*	5751*	6571*	5079*	5835*	4537*	5237*	4093*	4754*	3669*	4215*	3220*	3741*	2838*	4309*
1,5 m	supported	12768	12768	13651	13564*	11628	9538*	10317	8289*	9328	7328*	8567	6562*	7976	5954*	7518	5311*	6991*	4741*	6196
	unsupported	12768	11496	10261*	7622*	7418*	5670*	6502*	5018*	5793	4504*	5225	4072*	4680*	3579*	4132*	3141*	3675*	2775*	4260*
0 m	supported	16594	16594	15432	13628	12692	9553*	11306	8314*	10172	7368*	9296	6616*	8437*	5818*	7684	5171*	6883*	4630*	4184*
	unsupported	16594	11470*	10288*	7602*	7440*	5618*	6544*	4938*	5805*	4832*	5134*	3896*	4508*	3409*	3995*	3007*	3566*	2672*	2391*
- 1,5 m	supported	21384	21384	16564	13842*	12808	9732*	11504	8395*	10444	7267*	9480*	6355*	8481*	5618*	7543*	5022	6794*	4544*	-
	unsupported	16738*	11045*	10224*	7280*	7312*	5387*	6375*	4744*	5576*	4170*	4870*	3641*	4309*	3218*	3843*	2864*	3476*	2587*	-
- 3,0 m	supported	23715	23715	16834	13942*	13054	9457*	11797	8062*	10645	6998*	9445	6170*	8022	5511*	-	-	-	-	-
	unsupported	16551*	10892*	10067*	7143*	7070*	5168*	6068*	4463*	5295*	3910*	4686*	3470*	4198*	3114*	-	-	-	-	-
- 4,5 m	supported	23481	22069*	16077	12443*	11184	8547*	-	-	-	-	-	-	-	-	-	-	-	-	-
	unsupported	16481*	10836*	9829*	6835*	6899*	5013*	-	-	-	-	-	-	-	-	-	-	-	-	-



The given max capacity values in kilograms (kg) were determined acc. to ISO 10567 and include a stability factor of 33 % or 87% of the hydraulic lifting capacity. These values are applicable at the top of the arm (without bucket tipping cylinder and guide rod) with optimum positioning of the corresponding arm system and with power boost switched on. *Value limited due to hydraulics.

ATLAS

Dimensions Equipment: Base arm C23.41, boom 4,23 m (C25.46) with stick 2,65 m (D21.33)

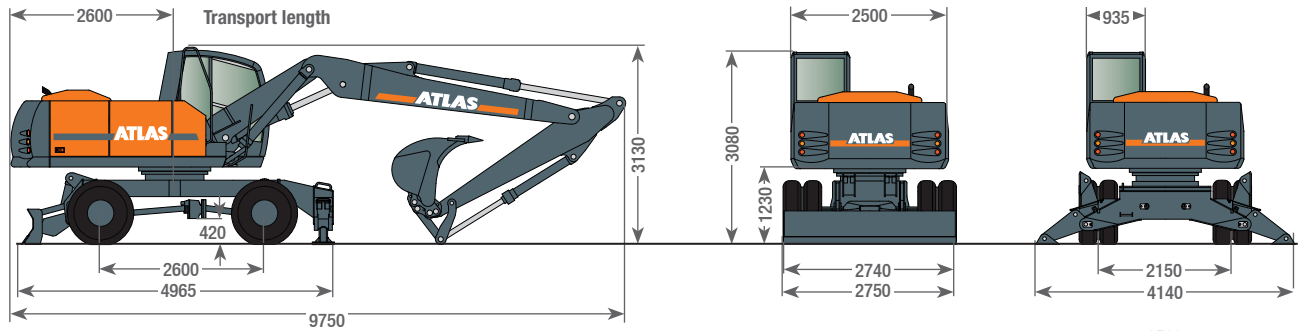

Working ranges of adjustable boom

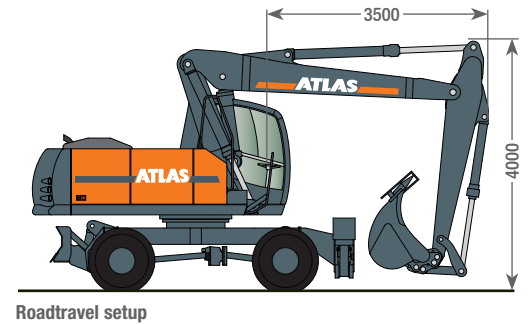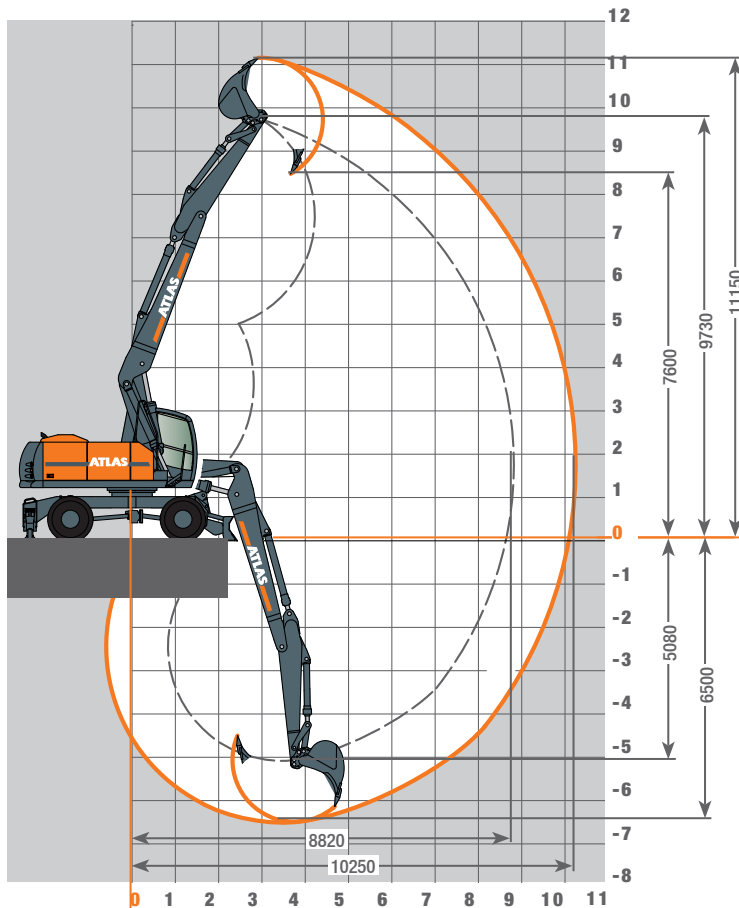

Equipment

Stick D21.33 - Length 2650 mm

Equipment: A 23.33, C23.41, D21.33, F25.1A, F63.28

A	Max. digging height	mm	11150
B	Max. dumping height	mm	7600
C	Max. dumping height	mm	6500
D	Max. digging reach	mm	10250
	Max. digging reach at ground level	mm	10100
	Bucket digging force	kN	176
	Stick digging force	kN	110

www.atlasgmbh.com

ATLAS Maschinen GmbH

EXCAVATORS

Atlasstrasse 6

27777 Ganderkesee, Germany

T: +49 (0) 4222 954 0

F: +49 (0) 4222 954 343

info@atlasgmbh.com

220W-EN (1) Effective date: August 2010. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas Maschinen GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas Maschinen GmbH. Copyright © 2010 Atlas Maschinen GmbH.

Ref. no. 6141713