

# Dynapac CC800 Plus

## Double drum vibratory rollers

*Atlas Copco*



### Technical data



#### Masses

Max. operating mass	1,665 kg
Operating mass (incl. ROPS)	1,575 kg
Module mass (front/rear)	740/835 kg



#### Traction

Speed range (Dual/TC/AS)	0 -9 km/h
Vertical oscillation	±13°
Theor. gradeability	40 %



#### Compaction

Centrifugal force	17 kN
Nominal amplitude	0.4 mm
Static linear load (front/rear)	9.3/10.0 kg/cm
Vibration frequency	70 Hz
Water tank	190 l



#### Engine

Manufacturer/Model	Kubota D1105-E4B T4f
Type	Water cooled diesel
Rated power, SAE J1995	18 kW (24 hp ) @ 2,800 rpm
Fuel tank capacity	23 l



#### Hydraulic system

Driving	Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe brake in both drums.

Find us locally at [www.atlascopco.com](http://www.atlascopco.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.



rce\_cc800plus\_en-20140430.145419.pdf 2014-04-30 14:54

# Dynapac CC800 Plus

## Double drum vibratory rollers

**Atlas Copco**

### Technical data

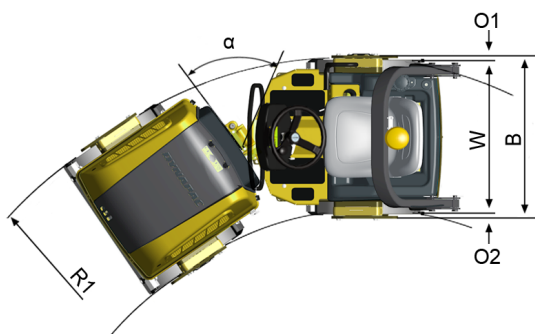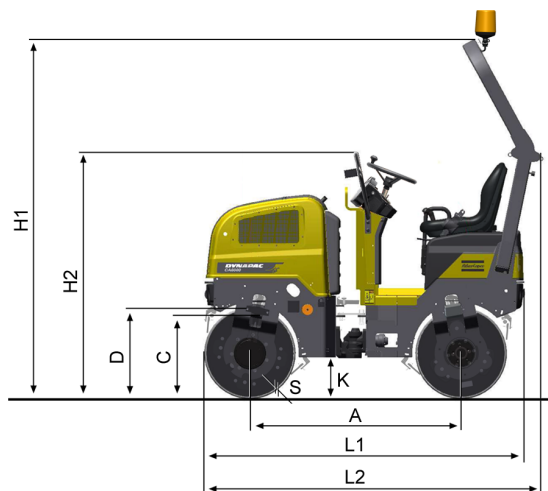

#### Dimensions

A. Wheelbase	1,350 mm
B. Width	874 mm
C. Curb clearance	465 mm
D. Drum diameter	588 mm
H1. Height, with ROPS/cab	2,300 mm
K. Ground clearance	250 mm
L1. Length	2,040 mm
O1. Overhang, right	35 mm
O2. Overhang, left	35 mm
S. Drum shell thickness	15 mm
W. Drum width	800 mm
α. Steering angle	±34°



#### Equipment package

CC Plus Package	Included	Optional
Backup alarm	■	
CE sign	■	
Comfort seat	■	
Cup/can holder	■	
Driving lights, right or left handed		■
Dual forward/reverse control		■
Foldable ROPS incl. seat belt	■	
Large Watertank, 190 l	■	
Rotating beacon	■	
Rotating beacon, ignition controlled		■
Spring loaded scrapers		■
Sprinkler timer	■	
Vibr. shut off, front or rear drum	■	
Working lights	■	



#### Optional equipment

3" seatbelt, Biodegradable hydraulic fluid, Cert. fire protection ( SBF 127), Decal risk location (GOST), Fire extinguisher, Hearing protectors, Licence plate light, Rear view mirror (traffic view), Service kit 50/500/1000 h, Side direction lights (driving lights required), Slow moving vehicle sign, Special color (one or two), Tool set, Water tank cover (lockable)

Find us locally at [www.atlascopco.com](http://www.atlascopco.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.

rce\_cc800plus\_en-20140430.145419.pdf 2014-04-30 14:54