



D 201 RH
D 201 RHS
D 201 RHG
D 201 RHGS

D 250 RM
D 250 RMS
D 250 RMG
D 250 RMGS
D 250 RHG
D 250 RHGS

D 300 RM
D 300 RHG



D 250/300 R



D 201 R



www.ause.com

AUSA Center, S.L.U. • Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ause@ause.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid • Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ause.madrid@ause.com
AUSA France • Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ause.france@ause.com
AUSA Verkauf & Service Deutschland • Heinrich - Welken Straße 5, 59069 HAMM - RHYNERN (GERMANY) Tel.: +49 (0) 2385-9359362 E-mail: info@ause.de
BEIJING Rep. Office • Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA
 Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ause.china@ause.com

AUSA UK • Sales: 07970639988 E-mail: ause.uk@ause.com

AUSA Brasil • Tel. +55 51 33622111 - E-mail: ause.brasil@ause.com


AUSA Mexico • Calzada Vallejo, 725. 07750 Del. Gustavo A. Madero, México D.F. (MÉXICO) Tel.: +55 2166-9066 - E-mail: ause.mexico@ause.com



	DIMENSIONS (mm)	D 201 RH / S	D 201 RHG / S	D 250 RM / S	D 250 RMG / S D 250 RHG / S	D 300 RM	D 300 RHG
D 201 RH _2000 Kg	A	1565	1540	1840 / 1700	1588 / 1520	1840	1568
	B	1445	1545	1632 / 1560	1690 / 1605	1632	1690
D 201 RHG _2000 Kg	C	1590 / 1750	1590 / 1750	1800 / 1800	1800 / 1800	1800	1800
	D	185	185	200 / 200	200 / 200	200	200
D 250 RM _2500 Kg	E	1195	1295	1380 / 1305	1530 / 1445	1380	1530
	F	2580	2580	2240 / 2240	2240 / 2240	2240	2240
D 250 RMG _2500 Kg	G	255	255	350 / 350	350 / 350	350	350
	H	885	925	993 / 807	926 / 842	993	926
D 250 RHG _2500 Kg	I	1640	1640	1730 / 1730	1730 / 1730	1730	1730
	J	715	715	500 / 500	500 / 500	500	500
D 300 RM _3000 Kg	K	3020	3280	3231 / 3044	3164 / 2980	3231	3164
	L	2245	2665	2580 / 2550	2840 / 2885	2580	2890
D 300 RHG _3000 Kg	M	275	535	603 / 417	536 / 452	603	536
	N	570	930	570 / 720	1030 / 1105	570	1030
	R	- / 2045	- / 2045	2100 / 2100	2100 / 2100	2100	-
	S	- / 3980	- / 3980	4174 / 4174	4174 / 4174	4174	-
	T	1590	1590	1700 / 1700	1700 / 1700	1700	1700
	U	-	215	- / -	177 / 100	-	177

S : Dumper equipped with self-loading shovel

V: maximum visibility with the shovel fully retracted (patented system)

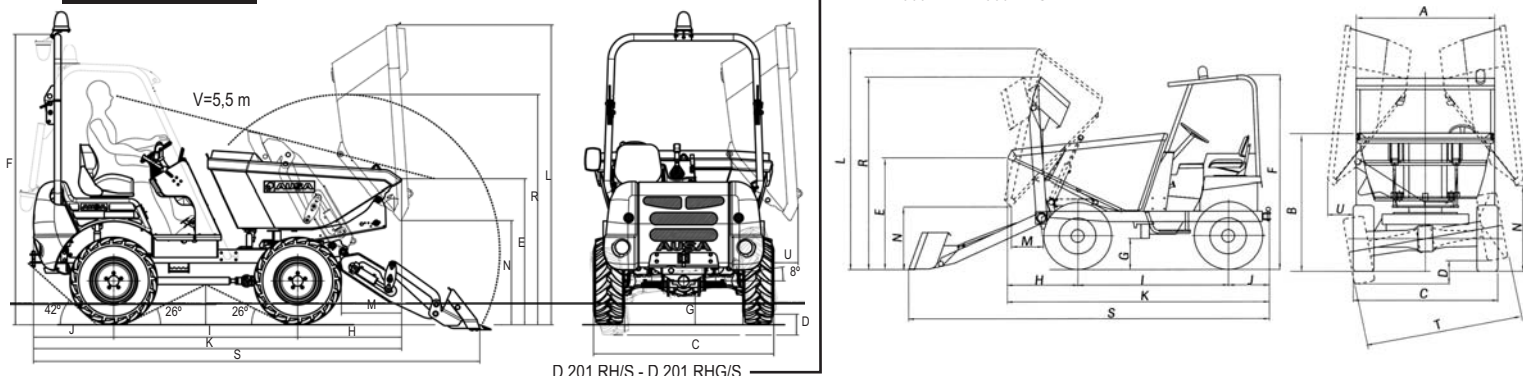

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS		D 201 RH / S		D 201 RHG / S	D 250 RM / S	D 250 RMG / S	D 250 RHG / S	D 300 RM		D 300 RHG		
Load capacity (Kg)		2000			2500			3000				
Unloading system		Frontal hydraulic		Hydraulic, 180° rotating	Frontal hydraulic	Hydraulic, 180° rotating	Hydraulic, 180° rotating	Frontal hydraulic	Hydraulic, 180° rotating			
Chassis		Rigid										
Hopper capacities (l)		Water	700	650	1290 (900 w/shovel)		1050 (850 w/shovel)	1050 (850 w/shovel)	1290	1050		
		Levelled	960	930	1800 (1315 w/shovel)		1200 (950 w/shovel)	1200 (950 w/shovel)	1800	1200		
		Heaped	1250	1230	1950 (1500 w/shovel)		1400 (1200 w/shovel)	1400 (1200 w/shovel)	1950	1400		
Engine		Diesel			KUBOTA V1505		Lombardini 9LD 626		ISUZU 4LE2		Lombardini 9LD 626	ISUZU 4LE2
		Power (KW/HP)			22.7 / 30.8 (SAE J1995)		17.5 / 23.8 (DIN 70020)		38/51.7 (SAE J1995)		17.5 / 23.8 (DIN70020)	38 / 51.7 (SAE J1995)
		N° of Cylinders			4		2		4		2	4
		Cooling system			Water		Air		Water		Air	Water
Drive		4 x 4 permanent Compen® System			4 x 4 permanent Compen® System (Models: RM, RMG, w/shovel) / 4 x 4 permanent (Models: RHG)							
Transmission		2-speed hydrostatic Electric gear inverter on the joystick			Mechanical, with 4 forward gears and 4 reverse		2-speed hydrostatic Electric gear inverter	Mechanical, with 4 forward gears and 4 reverse		2-speed hydrostatic Electric gear inverter		
Clutch		-			Dry single-disc $\varnothing$ 254 mm. Mechanically-driven			Dry single-disc $\varnothing$ 254 mm. Mechanically-driven				
Engine starting system		Electric - -										
Speed (max.) (Km/h)		20										
Unladen weight (Kg)		1600 / 1800	1850 / 2050	1970 / 2170					2000			
Gradeability		42%			35%		42%		38%			
Hydraulic circuit		Gear pump of 8 cc			Gear pump of 10.6 cc.							
		Working pressure 190 bar			Working pressure 150 bar.			Working pressure 160 bar.				
Tyres		Front	10.0/75-15.3 (10 PR)									
		Rear	10.0/75-15.3 (10 PR)									
External turning radius (mm)		4190			4500							
Steering		Hydraulic. Working pressure 80 bar.			Hydraulic. Working pressure 70 bar.							
Tank capacity (l)		Fuel	40						30			
		Hydraulic fluid	40			30						
Service brake		Sealed oil-immersed multidisc			Oil-immersed, multidisc, hydraulically operated		Hydraulic, drum-type, on front driving shaft	Oil-immersed, multidisc, hydraulically operated	Hydraulic, drum-type, on front driving shaft			
Parking brake		Sealed oil-immersed multidisc			Mechanical, drum-type, on front driving shaft							

STANDARD EQUIPMENT

	Anti vandal system	
	Audible reverse warning	
	Ergonomic seat with seat belt	
	ROPS protection	-
	Rotating beacon	-
	Rear view mirror	-
Self-loading shovel *	Volumetric capacity	180 l.

* (only RMS/RHS/RMGs/RHGS models)

OPTIONAL EQUIPMENT

	Closed cabin	
	Front windscreen with wiper	
	Second seat	
	FOPS/ROPS	FOPS/ROPS protective roof (Seat belt, rotating beacon, rear view mirror)
		Homologated lighting equipment
		Towing hitch
Back-hoe (only in self-loading shovel version)	-	Maximum digging deep: 2750 mm. Break out power: 3970 kg. Transportation height: 2250 mm. Fast-attach system of the backhoe to the dumper. Operating site: 360° rotating seat. Weight: 900 Kg.