



T 276 H
T 306 H
T 307 H



www.ausa.com

AUSA Center, S.L. • Ctra. de Vic, Km 2.8 - P.O.B. 194. 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 - E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid • Pol. Ind. Coslada - C. Marconi 15-17. 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
AUSA France • Z. I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
AUSA Deutschland • Heinrich - Welken Str. 5. 59069 HAMM (GERMANY) Tel.: +49 (0) 2385-9359362 - E-mail: ausa.deutschland@ausa.com
BEIJING Rep. Office • Address Room 527. HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - BEIJING 100026 (CHINA)
 Tel.: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com
AUSA UK • Tel.: 07970639988 - E-mail: ausa.uk@ausa.com
AUSA Brasil • Tel.: +55 51 33622111 - E-mail: ausa.brasil@ausa.com
AUSA México • Calzada Vallejo, 725. 07750 Del. Gustavo A. Madero, México D.F. (MÉXICO) Tel.: +55 2166-9066 - E-mail: ausa.mexico@ausa.com



FEM-AEM





T 276 H
T 306 H
T 307 H



www.ausa.com

DIMENSIONS (mm)	T 276 H	T 306 H	T 307 H
A	2115/2080	2070	2070
B	355	275	275
C	1980	2015	2015
D	R3220	3075	3075
E	968	968	1270
F	2290	2290	2290
G	786	786	786
H	497	497	799
I	1200	1200	1200
J	5244	5244	5546
L	4054/4019	4054	4054
O	6099/6064	6060	7000
P	+20°	+20°	+20°
R	-115°	-115°	-115°

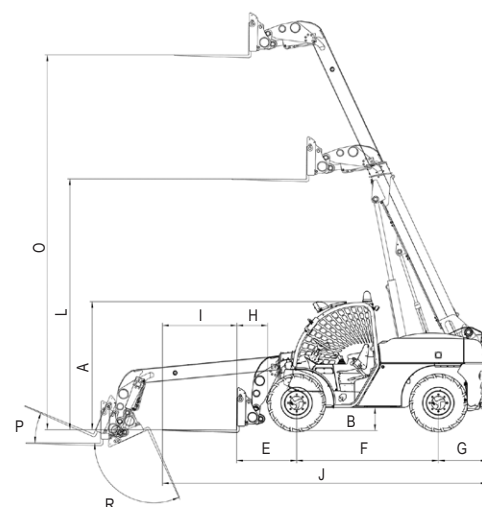

TECHNICAL SPECIFICATIONS


		T 276 H	T 306 H	T 307 H
Load capacity	Max. load (Kg)	2.700 @ 500 mm	3.000 @ 500 mm	3.000 @ 500 mm
	Load at max. height (Kg)	2.700 @ 500 mm	2.700 @ 500 mm	3.000 @ 500 mm
Lifting height	Maximum lifting height (mm)	6.100 @ 500 mm	6.060 @ 500 mm	7.000 @ 500 mm
	Lifting height at max. load (mm)	6.100 @ 500 mm	5.100 @ 500 mm	7.000 @ 500 mm
Reach	Max reach (mm)	3.400 mm	3.410 mm	3.580 mm
	Capacity at max reach (Kg)		1.000 Kg	
Unload weight (Kg)		5.015 Kg	5.400 Kg	5.615 Kg
Engine	Turbo-diesel	Kubota V 3600-T		
	Power/SAE J1995 (KW / HP)	62,3 / 84,7		
	Torque	270 Nm		
	N° of cylinders	4		
		Water		
Traction		4x4x4 permanent		
Steering		Hydraulic		
		Front wheel steer / All wheel steer / Crab steer		
Transmission		Hydrostatic 2 gears	Hydrostatic 2 gears	Hydrostatic 1 gear
Engine starting system		Electric		
Speed (km/h)		24 Km/h		
Axles		Dana Spicer		
Gradeability		40% (standard) / 45% (wheels TT)	43%	39%
Hydraulic circuit	Working pressure	240 bar	260 bar	260 bar
	Hydraulic pump	36 cc		
	Flow circuit (l/min)	73,4 l/min		
Tyres	Front	12,5 / 80 - 18	14 - 17,5	14 - 17,5
	Rear	12,5 / 80 - 18	14 - 17,5	14 - 17,5
External turning radius (mm)		3220 mm	3.075 mm	3.075 mm
Tank capacity	Fuel (l)	110 l		
	Hydraulic fluid (l)	70 l		
Service brake		Disc brake		
Parking brake		Mecanically actuated disk-brake		

STANDARD EQUIPMENT


Homologated FOPS/ROPS tilting cabin for easy service
Joystick with integrated functions, "total control of movements"
Adjustable ergonomic seat with safety belt
Rear view mirror
Audible reverse warning
Rotating beacon
Antivandalic system
Limited slip differential on front axle
4th auxiliary hydraulic service with quick coupling
Road Traffic Selector: Lock joystick and 2 front wheels steering
Active safety system with boom locking by instability/ Engine start lock with hand brake activated / Control arm lock without driver

OPTIONAL EQUIPMENT


Semi-closed cabin
Closed soundproof cabin with heater
Air conditioning integrated under the cabin
Radiostereo CD
Adjustable steering column
Front protective grille
Load backrest
Electronic anti theft protection system
Homologated lighting equipment
Working light
5th auxiliary hydraulic service with quick coupling
Hydraulic quick coupling system (Universal SLL type or Euro)
4th auxiliary hydraulic service with continuous flow
Other tyres pattern available
FEM III forks carriage with or without integrated side-sift (TDL)
Bucket 4 in 1
Bucket 600 lt / Bucket 700 lt / Bucket 1.000 lt
Multiple attachments available proven and tested from factory

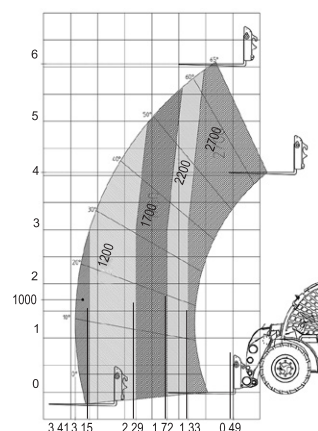

T 276 H

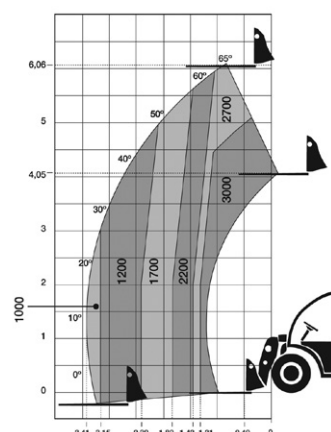

T 306 H

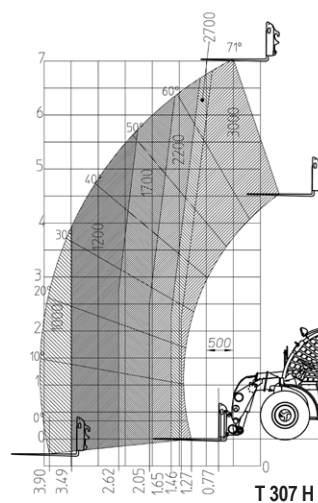

T 307 H