



D267  
D337T

# Wheelloaders



Giant made in Holland



# Wheelloaders

To full fill the needs and demands of her customers Tobroco offers a wide range of wheel loaders. This range consists out of 25 different types of loaders with a service weight between 1000 kg and 4150 kg. In this leaflet, we will show you the range of Giants with a service weight of 2000 kg to 2100 kg. For further information about other types and implements we refer to our other leaflets or our website ([www.tobroco.com](http://www.tobroco.com)).



## D267 - D337T

These mini wheel loaders are equipped with Kubota diesel engines. With 26 and 33 HP. The machines are equipped with a Bosch Rexroth automotive hydraulic pump which contributes to very smooth and powerful driving characteristics. Heavy axles, four-wheel drive, mechanical driveshaft, and an automatic differential lock mode ensure that the machine can use in his power for maximum results. Strong pivoting articulation, all wheels at all time in contact with the ground and the machine moves with maximum traction.



For working with potentially falling objects is use of a ROPS/  
FOPS safety is mandatory.

## Giant attachments

Here is a part of our wide range of attachments. The complete range of attachments can be found in the folder "attachments" or on our website ([www.tobroco.com](http://www.tobroco.com)).



# Technical data

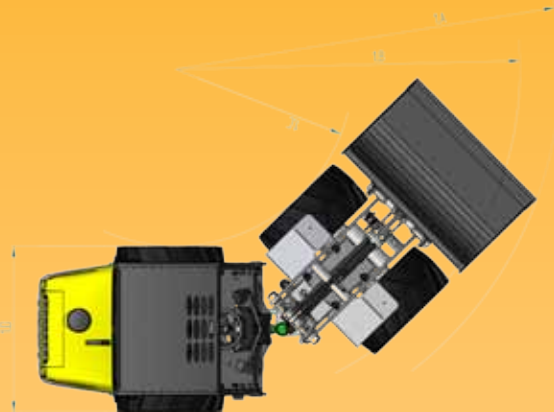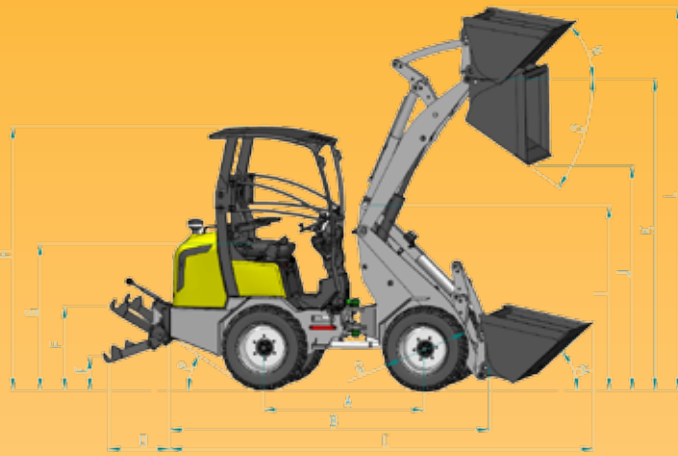

The Giant wheel loaders are equipped with the latest Kubota diesel engines. Which meet the latest emission requirements. The engines are cleaner and have less CO<sub>2</sub> emissions. Standard machines are fitted with large water and oil coolers. The engines are mounted on specially designed silent blocks so that vibration and noise level are reduced to a minimum. In order to increase the comfort Giant wheel loaders have silent blocks under the driver's platform. With a luxury suspension seat with arm and headrest. This machine gives the luxury that every driver want. With the standard hydraulic quick-change system is the connecting and disconnecting of the attachments very easy.



10.0/75x15 AS (76x26 cm)  
104 cm machine width



31x15.5-15 AS (80x37 cm)  
128 cm machine width



31x15.5-15 TR 06 (80x37 cm)  
128 cm machine width



31x15.5-15 Skid (80x40 cm)  
132 cm machine width

| 1                     | D267                        | D337T                             |
|-----------------------|-----------------------------|-----------------------------------|
| Engine                | 3 cyl. Kubota 26 hp / 19 kW | 3 cyl. Kubota turbo 33 hp / 24 kW |
| Service weight        | 2000 kg                     | 2100 kg                           |
| Driving hyd.          | Hydrostatisch automotiv     | Hydrostatisch automotiv           |
| Driving speed         | 0-12km/h                    | 0-18 km/h                         |
| Driving mech.         | Standard axles              | Standard axles                    |
| Differtial lock       | Automatic both axles        | Automatic both axles              |
| Standard tyres        | 10.0/75-15.3 AS             | 10.0/75-15.3 AS                   |
| Service brake         | Hydraulic                   | Hydraulic                         |
| Parking brake         | Drumbrakes                  | Drumbrakes                        |
| Quick linkage         | Giant hydr quick-fit        | Giant hydr. quick-fit             |
| Driving hydraulics    | 84 ltr/min (380 bar)        | 105 ltr/min (380 bar)             |
| Working hydraulics    | 45 ltr/min (180 bar)        | 45 ltr/min (190 bar)              |
| Lifting capacity      | 1600 kg                     | 1650 kg                           |
| Tipping load straight | 1400 kg                     | 1450 kg                           |

| 2                        | D267    | D337T   |
|--------------------------|---------|---------|
| S                        | 1430 kg | 1450 kg |
| T                        | 1220 kg | 1250 kg |
| U                        | 910 kg  | 950 kg  |
| U (extended lifting arm) | 840 kg  | 880 kg  |
| V                        | 705 kg  | 745 kg  |
| W                        | 1975 kg | 2000 kg |
| X                        | 1250 kg | 1270 kg |
| Y                        | 970 kg  | 1000 kg |

Tippingload in straight position, without extra counterweights

| 3                                     | D267 | D337T |
|---------------------------------------|------|-------|
| A Wheel base                          | 1515 | 1515  |
| B Total lenght without bucket         | 2975 | 2975  |
| C Total lenght with bucket            | 3690 | 3690  |
| D Lenght 3-point lifting arm (option) | 622  | 622   |
| E Min height 3 point hitch            | 134  | 134   |
| F Max. height 3 point hitch           | 797  | 797   |
| G Seat height                         | 1256 | 1256  |
| H Min. height with Rops safetybar     | 1740 | 1740  |
| Max. height with Rops safetybar       | 2355 | 2355  |
| Max. height with FOPS safetyroof      | 2300 | 2300  |
| Max. height with cabine               | 2280 | 2280  |
| I Height frontframe                   | 1480 | 1480  |
| J max. dump bucket                    | 1988 | 1988  |

| 3 (continued)                            | D267  | D337T |
|--|-------|-------|
| K Max. bucket pin height                 | 2825  | 2825  |
| max. bucket pin height extended lift arm | 2920  | 2920  |
| L Height with bucket                     | 3392  | 3392  |
| M Roll back angle ground level           | 43°   | 43°   |
| N Roll back angle                        | 47°   | 47°   |
| O Max. dump angle                        | 53°   | 53°   |
| P Max. drive angle                       | 29°   | 29°   |
| Q Diameter standaard tyre                | 760   | 760   |
| 1A Maximum radius                        | 1317  | 1317  |
| 1B Outer turning radius                  | 1125  | 1125  |
| 1C Inner turning radius                  | 10241 | 1021  |
| 1D Width                                 | 1040  | 1040  |

Hydraulic quick change Giant, 3e hydr. Function, width range of attachments designed and produced by Tobroco.

Rops/Fops safety roof, comfortable suspension seat with armrests and headrest. Driving platform on Rubber suspension silent blocks.



Cyclone filter standard, big kombi-cooler (oil and water) 2 big hydraulic oil tanks, modern Kubota engine.

# Wheelloaders

Giant wheel loaders are totally designed and produced in own management in Oisterwijk (the Netherlands). In 2009 Tobroco Machines has started with the development for new models for the existing range. These new models will replace the existing ones.

For development Tobroco Machines is using a sophisticated 3-dimensional design program. Thus before taken a machine in production, it's performance can be tested already. During the development of the new models Tobroco takes care of the demands and needs of their customers. Tobroco is a specialist in compact wheelloaders.

In the modern plant in Holland they build the Giant wheelloaders. We work with the best suppliers: Kubota, Rexroth. Giant is robust, durable and quality made in Holland! Also Tobroco Machines offers you a very big variety of implements. The majority of these implements is designed and produced by Tobroco Machines, and because of this, the implements are optimally adapted for your Giant, which is more efficient this way.



## GIANT MADE IN HOLLAND



### Tobroco Machines

Beneluxstraat 4  
5061 KE Oisterwijk, Holland  
Tel: +31 (0)13 521 12 12  
Fax: +31 (0)13 523 40 45  
E-mail: [info@tobroco.nl](mailto:info@tobroco.nl)  
Internet: [www.tobroco.com](http://www.tobroco.com)



All technical data in this brochure refer to series models that have been tested under operating conditions typical of Central Europe and describe their standard functions. Specifications and their modes of functionality as well as accessories listed in this brochure depend on the individual model and on the options available with a particular product as well as the statutory requirements of the country of sale. Illustrations used in this brochure may show products that have not been mentioned or that are not available as series production machines. The descriptions, illustrations, weights and technical data published herein are non-binding in nature and represent the technical status at the time the document went to press. Because of ongoing development, we reserve the right to make changes, without prior notice, to the design, specification, visual appearance and technology of our products. Should you require special functions that would be available only by using additional components and/or under special circumstances, please feel free to contact us. We will be happy to answer any questions you may have and to provide further information regarding whether and under what conditions applying to the product and the target environment such special functions might be feasible. If you have any concerns about the load capacity or operation of our products in certain working conditions or environments, we recommend that you perform a test run under controlled conditions. Despite meticulous attention to detail, we cannot exclude the possibility that our products may not conform to illustrations or stated dimensions, or that errors may have occurred in calculation or during printing, or that the information given here may be incomplete. Consequently, we do not accept liability for the accuracy or completeness of the information supplied in this brochure. All matters relating to our product warranty are contained within our General Terms and Conditions. We expressly decline to provide additional guarantees. Any liability over and above that contained within our General Terms and Conditions is excluded.