

Standard Features

Hydraulic

- Pilot Operated Joysticks
- Joystick Operation ISO pattern
- PTO Piping with Stop Valves
- Boom Cylinder Protection
- Circuit Identification
- Cushioned Cylinders
- Double Acting Hydraulic Circuit

Cab

- Adjustable Heater
- Fully Adjustable Fabric Seat
- Floor Mat
- Integrated Seatbelt
- Arm & Wrist Support
- Cab Harness for Light/Beacon
- Ashtray
- 12V Power Socket
- Emergency Break Glass Hammer
- Cab Light
- Pre-Wired for Radio Installation
- Protected Drive Light
- Cup Holder

Attachment

- Standard Arm
- Boom Light
- Boom Lowering Valve

Track

- Short Pitch Rubber Tracks
- Two-Speed Travel
- Straight Line Travel

Other

- Essential Tool Kit

Optional Extras

Cab

- PVC Seat
- AM FM Radio Mono Speaker

Canopy

- FOPS & TOPS Compliant

Attachment


- Long Arm
- Quick Hitch
- Boom Anti-drop Valve
- Arm Anti-drop Valve

Track

- Steel Crawler
- Steel Crawler Pads

Other

- Breaker
- Fourth Line Hydraulics

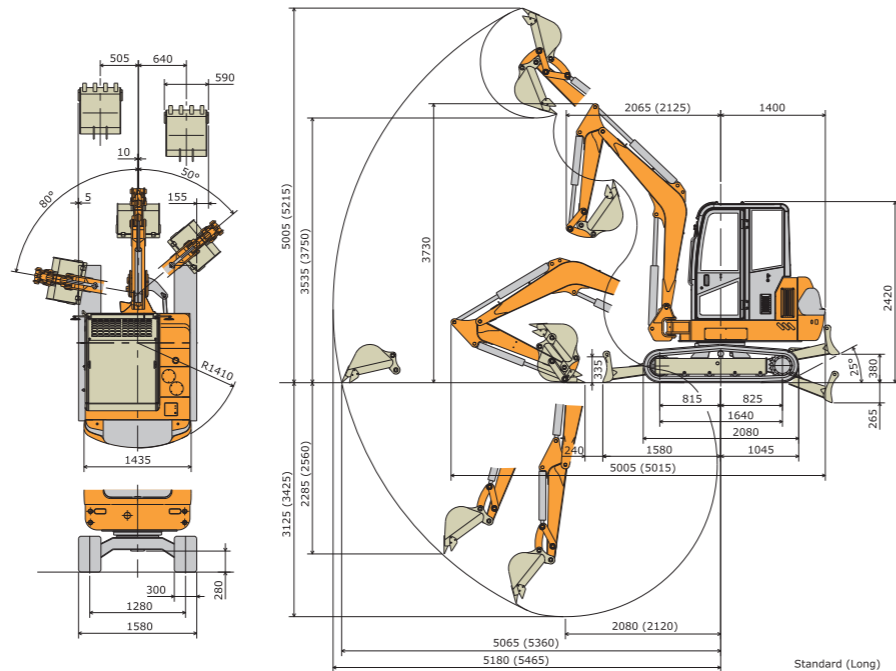

Specification

Machine weight	(Cab - Rubber Tracks / Cab - Steel Tracks)	kg	3490 / 3570
Dimension (length / width / height)		mm	5005 (5015) / 1580 / 2420
Dozer blade dimensions (width / height)		mm	1580 / 335
Bucket (capacity / width), std. ISO7451		m ³ /mm	0.10 / 590
Noise Level		LwA / LpA	94/80
Engine	Model	-	mitsubishi S3L2
	Displacement	cc	1318
	Rated power	-	19.9kW / 27.0ps / 2400 rpm
	Fuel tank capacity	litres	42
Working Range	Max. digging depth (Std / Long)	mm	3125 / 3425
	Max. digging height (Std / Long)	mm	5005 / 5215
	Max. dumping height (Std / Long)	mm	3535 / 3750
	Max. vertical digging depth (Std / Long)	mm	2285 / 2560
	Max. digging radius (Std / Long)	mm	5180 / 5465
	Max. reach at ground (Std / Long)	mm	5065 / 5360
	Min. turning radius front (Std / Long)	mm	2065 / 2125
	Rear turning radius	mm	1410
	Min. turning radius swing (Std / Long)	mm	1680 / 1740
	Boom swing angle (L / R)	degrees	L80 / R50
Performance	Max. digging power Bucket / Arm (Std / Long)	kN	30.1 / 17.9 (30.1 / 15.7)
	Travelling speed (low / high)	km/h	2.5 / 4.5
	Slew speed	min ⁻¹	8.7
Hydraulic System	Pump	Type	Piston 2 + Gear 1
		Oil flow quantity	litres/min
			42 / 42 / 25.2
	PTO	Oil flow quantity	litres/min
			67.2
	Main relief pressure	MPa	20.6 / 20.6 / 17.2
	Hyd. tank capacity	litres	50.5

Lifting Capacity (kgf) Standard Arm, Cab

Lifting point Height (m)	Lifting point radius (3.0m)			Lifting point max radius			m
	Blade Down	Blade Up	Over-side	Blade Down	Blade Up	Over-side	
2.0	768	768	712	596	436	383	4.3
0.0	1057	735	634	601	421	368	4.2
-1.0	946	730	629	588	502	438	3.8



www.hanixeuropa.com

Hanix Europe Limited
Unit B, Alliance Industrial Estate, Windmill Lane, Denton
Manchester, M34 3SP. United Kingdom

Tel: +44 (0)161 335 2330 Fax: +44 (0) 161 335 2349
Email: sales@hanixeuropa.com

H36C

Compact 3.5 tonner offering proven reliability and excellent all-round performance



Low Environmental Impact

- Lean burn fuel-efficient Mitsubishi engine saves on fuel and lowers emissions.
- Emissions conform to Stage III A (EU)/Interim Tier 4 (EPA) regulations.
- Engine bay fitted with high quality sound proofing to reduce noise pollution.
- Exceptional power to weight ratio for reduced emissions.



Ergonomic Concept

- Ergonomically designed controls for ease of operation and reduced operator fatigue during prolonged work periods.
- Joystick controls for precision operation.
- Switch between low and high speed travel at the touch of a button.



Improved Operator Comfort

- Cab designed for operator comfort with heater / defroster, 12V auxiliary socket, easy clean interior - and even a cup holder.
- Fully adjustable operator seat linked to joysticks for superior operational control.
- Short pitch rubber tracks reduce travelling noise and vibration.



Functional Design

- Hoses routed and protected to prevent damage.
- Enlarged engine covers and detachable high shoulder counterweight for easy servicing.
- All grease points and boom cylinder have protection guards as standard.
- PTO stop valves allow quick change of attachments.

The Hanix H36C has the strength and stability for the toughest digging, loading and grading tasks.

The easy to operate H36C is the ideal mini-excavator for the owner operator or plant hirer. It's a robust, durable machine that's extremely dependable and provides high levels of operator safety, comfort and control. A powerful, fuel efficient engine, together with a variable output piston pump, provides smooth responsive power for all operations.

Better Performance

- Wider operating range and stronger breakout force with greater stability.
- Ergonomically designed controls reduce operator fatigue.
- PTO stop valves allow quick change of attachments.
- Switch between low and high speed travel at the touch of a button.

