

Mecalac

ARTICULATED LOADER **AX 1000**



> Experience of your worksite

ARTICULATED LOADER

AX 1000

LET'S HAVE A LOOK

- **49 kW / 67 hp at 2800 rpm**
- **Payload on forks: 2600 kg**
- **Manually switched 100% differential lock on front and rear axle**




Optimum front and rear view due to monoboom and compact rear end



**Mecalac
Single
Arm
Power**

Monoboom with powerful protected Z-kinematics and parallel guidance

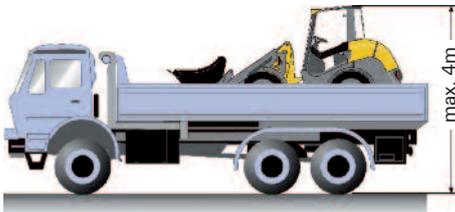

Transportation height < 4m

Electrohydraulic brand-compatible quick-coupler

Extensive range of attachments




AT YOUR ADVANTAGES

Mecalac Self Stabilising Concept

Maximum travelling comfort on any ground thanks to auto-stabilised oscillation

Mecalac Panorama Cab

Device height: 2455 mm

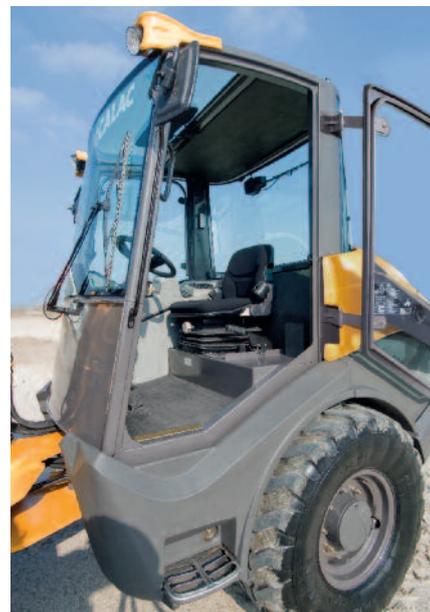

Comfortable cab with excellent all-round visibility and easy access



Hydraulic on demand fan control

ARTICULATED LOADER
AX 1000

POWERFUL AT WORK



Due to the monoboam, the Mecalac AX features high breakout forces. Its Z-kinematics allow for perfect parallel guidance of attachments. This results in a high degree of safety, in particular when loading pallets. Fast tipping cycles and an excellent view on the attachments make daily work even more efficient.

The self-stabilizing articulated oscillating centre-pivot makes for maximum stability and comfortable driving even when working on uneven grounds.



COMFORTABLE AND ECONOMIC



The spacious cabin and the ergonomically laid out controls offer a convenient workplace for long-term work. Large tinted windows ensure an excellent all-round visibility.

The panorama roof allows for an exact overhead view, for example for truck loading.

A multi-position comfort swivel seat, glove-box with ample storage space and a powerful 3-stage ventilation and heating system make daily work a pleasure.



ARTICULATED LOADER
AX 1000

TECHNICAL DATA

Operating weight: 5475 kg
Engine power: 49 kW (67 hp)
Bucket capacity: 1.0 – 1.6 m³



- Monoboom (Mecalac Single Arm Power) with hydraulic quick-coupler
- Powerful Z-kinematics
- Mecalac Self Stabilising Concept
- Mecalac Panorama Cab with removable cabin top

- Power-controlled high-performance hydrostatic drive
- Planetary axles with manually switched 100% differential lock on front and rear axle
- Smooth joystick operation
- Extensive range of attachments

Engine

Low-noise water-cooled 4-cylinder John Deere turbo diesel engine (emissions according to EU-RL 97/68), 4-stroke, direct injection

Net power at 2800 rpm
acc. to SAE J 1995 (67 hp) 49 kW

Max. torque at 2000 rpm
acc. to ISO 9249 228 Nm

Spec. fuel consumption at max. torque 242 g/kWh

Cooling: controlled hydraulic fan drive

Air intake filter: 2-level dry-air filter

Electrical system:
Operating voltage: 12 Volt
Battery capacity: 66 Ah
Alternator rating: 980 Watt 70 A
Starter rating: (2.7 hp) 2.0 kW

Drive

Hydrostatic, controlled drive, 2 stages for maximum propulsive force, stages shiftable under load, multifunction lever (joystick) for drive and working hydraulics control

Axles: large-scale production planetary axles

Differential lock: manually switched differential lock in both axles, locking value 100%

Wheels: tyre size: 365/70 R18
alternatively: 405/70 R18

Speeds: road gear: 0-20 km/h
(optional 30 km/h)
field gear: 0-7 km/h

Oscillation: max. oscillation angle +/- 11°

Ground clearance: measured at differential 350 mm

Brakes

Working brakes:
1. hydrostatic inching brake, acting on all 4 wheels
2. hydraulically operated disk brake at the front axle, acting on all 4 wheels

Parking brake:
Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive

Steering

Hydrostatic articulated steering
Max. steering angle 2 x 40°
Turning radius over rear R = 3540 mm

Hydraulic system

Single circuit hydraulics with central gear pump (lift/lower, tilt, quick-coupler) and steering (via priority valve); three-way control valve with primary and secondary safeguards

Max. power at 2800 rpm 60 l/min and 250 bar

Floating position for lifting cylinders

Cylinders:	2 lifting cylinders	80 ø
	1 tilting cylinder	100 ø
Cycle times:	Lift (under load)	4.8 s
	Lower	2.9 s
	Crowd time	1.6 s
	Dump time	2.3 s

Performance data

Digging depth with standard bucket:	95 mm
Bucket position:	Crowd angle 45°
	Dump angle top max. 46°
	Dump angle max. 125°
Lifting force:	4450 daN
Breakout force:	4300 daN
Thrust force:	3800 daN

Tippling load:
standard bucket, straight 4100 kg
standard bucket, articulated 3690 kg

Payload/machine (even ground):
on forks, frontal 2600 kg
on forks, articulated 2300 kg
on forks, frontal* 2950 kg
on forks, articulated* 2700 kg

Tippling load according to ISO 14397
Payload according to EN 474-3
* Transport position 300 mm above ground

Chassis

Robot-welded front and rear chassis with self-stabilising articulated oscillating centre-pivot for max. stability in articulated position. Monoboom with patented protected Z-kinematics on the inside. This allows exact parallel guidance of the pallet fork and excellent visibility on working attachments. Operator's cabin with flexible four-point mountings for maximum driver comfort and minimum noise levels. Smooth, precise operation joystick control.

Filling capacities

Engine with filters approx.	8.5 l
Fuel tank approx.	70.0 l
Front axle total approx.	5.9 l
Rear axle total approx.	6.5 l
Hydraulic system incl. tank approx.	60.0 l

Standard features

Spacious ROPS cabin (Mecalac Panorama Cab) with removable cabin top. The driver door, which opens through 180°, and the large wide-opening side window can be locked within the machine contour. Tinted windows, electrical wipers front and rear, incl. front and rear screen washers, rear screen heating, 2 external rear-view mirrors, ergonomic joystick controls, multiply adjustable driver's seat, adjusts to driver's weight, safety belt, sunshade, heater and fresh air system with external air filter, interior lighting, 12V power outlet, storage space, central multifunction display, display elements and control lights with symbolic indicators, 2 driving lights on front, reversing lights, indicators, brake and tail lights, hydraulically operated quick coupler, electro-hydraulic locking system, towing hitch, fastening points, radio-ready cabin
Colour scheme: yellow/grey


Optional equipment

30 km/h version, 405/70 R18 tyres, exhaust outlet above hood, 360° warning light, bucket protector for compliance with road-safety requirements, reverse warning system, additional hydraulic system for frontal attachments, pipe break protection, boom suspension system, biodegradable oil fill for hydraulic system, main battery switch, radio, glove compartment with cover, 2 working lights at the front and rear of the cabin roof, air conditioning, pressureless return line, immobilizer transponder, road-safety kit, various attachments possible such as multi-purpose bucket, pallet fork, load hook, etc.

Weight


Machine with quick-change mechanism and with standard bucket 1.0 m³ and teeth 5475 kg
permissible axle load, front 3500 kg
permissible axle load, rear 3500 kg

Measurements

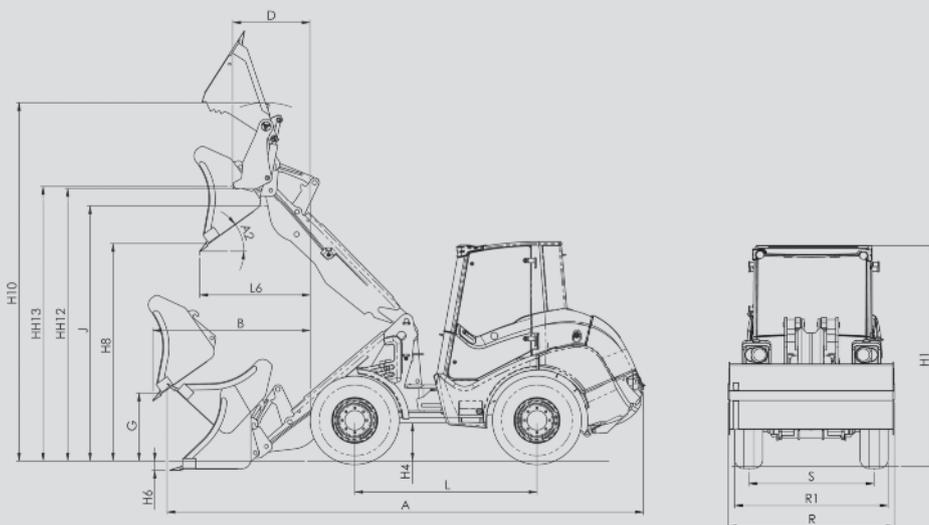


Buckets		
Standard	1.0 m ³	4 x 1 0.95 m ³
A	5345	5525
A2	46°	46°
B	1660	1795
D		925
G	615	475
H1	2455	2455
H4	425	425
H6	95	70
H8	2430	2295
H10	4135	4050
HH12	3050	3050
HH13		3040
J	2860	2860
L	2030	2030
L6	730	895
R	1950	1950
R1	1800	1800
S	1400	1400

HIGHLIFT		
Buckets		
Standard	1.0 m ³	4 x 1 0.95 m ³
Density	1.4 t/m ³	1.4 t/m ³
H8	2730	2600

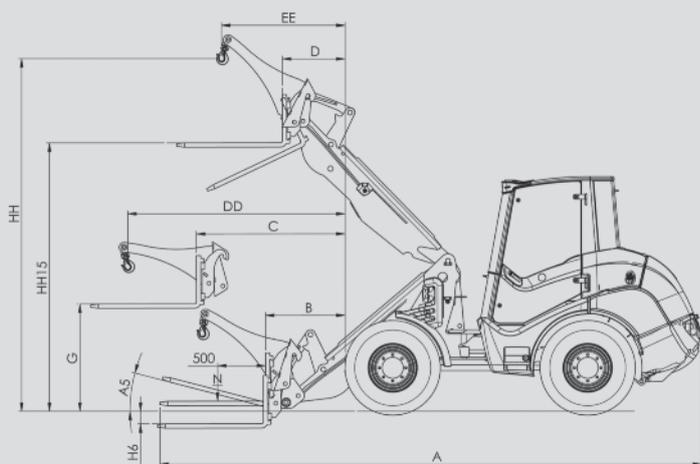

Forks		Load hook
A	5720	5320
A5	19°	
B	915	
C	1330	
D	515	
DD		2165
EE		1340
G	1110	
H6	125	
HH		3685
HH15	2810	

Range of attachments

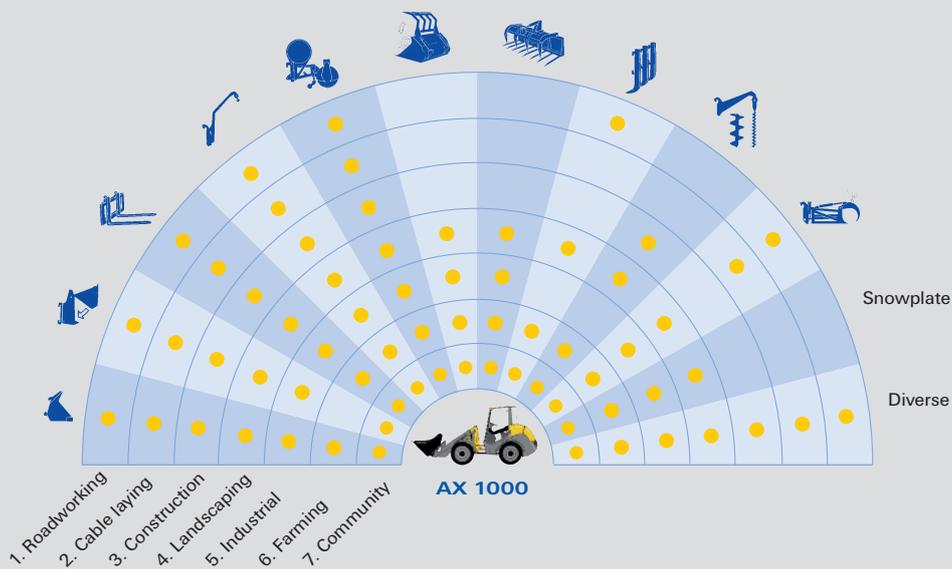


All data based on standard tyres. Technical data are non-committal and are subject to constructional modifications!



For decades we develop and produce high quality and innovative wheel loaders in Büdelsdorf in northern Germany. With our articulated loaders, four-wheel steered front loaders and four-wheel steered swing loaders, we are the world's only manufacturer to offer all steering concepts. Our four-wheel-steered swing loaders stand as the world's technologically most innovative wheel loaders.



Your Local Dealer



Mecalac

MECALAC BAUMASCHINEN GMBH · Am Friedrichsbrunnen 2 · D-24782 Büdelsdorf
Phone +49 (0) 43 31/3 51-319 · Fax +49 (0) 43 31/3 51-470 · info@mecalac.de · www.mecalac.com
A COMPANY OF GROUPE MECALAC S.A.