

JOLLY

343



officine
PICCINI®



JOLLY

343

Informazioni tecniche
Technical information
Informations techniques
Informaciones técnicas



MOTORE	ENGINE	MOTEUR	MOTOR	
Marca / Tipo	Brand / Type	Marque / Type	Marca / Tipo	ISUZU 3LD1
Raffreddamento	Cooling system	Refroidissement	Enfriamiento	Acqua - Water - Eau - agua
Cilindrata / Cilindri	Displacement / Cylinders	Cylindrée / Cylindres	Cilindrata / Cilindros	1496 / 3
Potenza	Power	Puissance	Potencia	34 HP 24 Kw - 3000 giri/1'
PRESTAZIONI	PERFORMANCES	PERFORMANCES	PRESTACIONES	
Carico operativo benna	Operating load bucket	Charge opérationnelle godet	Carga operativa cuchara	400 Kg.
Carico ribaltamento	Tipping load	Charge basculement	Carga de vuelco	800 Kg.
Capacità benna raso / colmo	Bucket capacity water / heaped	Capacité godet en eau / dôme	Capacidad cuchara en agua / cumbre	250 / 320 Lt.
TRASMISSIONE	TRANSMISSION	TRANSMISSION	TRANSMISIÓN	
Idrostatica con pompa doppia a portata variabile	Hydrostatic with double body pump at variable displacement	Hydrostatique avec pompe double à débit variable	Hidrostática con bomba doble de caudal variable	☒
IMPIANTO IDRAULICO DI SERVIZIO	SERVICE HYDRAULIC SYSTEM	INSTALLATION HYDRAULIQUE SERVICES	INSTALACIÓN HIDRÁULICA SERVICIOS	
Pompa ad ingranaggi	Gear pump	Pompe à engrenages	Bomba a engranajes	N°1
Portata max.	Max. flow rate	Débit maxi.	Capacidad máx.	33 Lt. / 1'
Pressione di taratura	Pressure setting	Pression de réglage	Presión de ajuste	180 Bar
Scambiatore di calore	Oil cooler	Radiateur huile	Radiator aceite	☒
SISTEMA DI GUIDA	DRIVING SYSTEM	SYSTEME DE CONDUITE	SISTEMA DE CONDUCCIÓN	
2 joy-stick proporzionali idraulici 4x4	No. 2 hydraulic proportional joystick 4x4	2 joy-stick proportionnels hydrauliques 4x4	2 joy-stick proporcionales hidráulicos 4x4	☒
VELOCITA'	SPEED	VITESSE	VELOCIDAD	9.5 Km / h
SERBATOI	TANKS	RESERVOIRS	DEPÓSITOS	
Gasolio	Fuel	Gasoil	Nafta	45 Lt.
Olio idraulico	Hydraulic oil	Huile hydraulique	Aceite hidráulico	45 Lt.
Lubrificazione catene	Chain lubricant	Lubrification chaînes	Lubricante cadenas	6.5 + 6.5 Lt.
IMPIANTO ELETTRICO	ELECTRIC SYSTEM	INSTALLATION ELECTRIQUE	INSTALACIÓN ELÉCTRICA	
Tensione di servizio	Operating voltage	Tension de service	Tensión de servicio	12 V
Batteria	Battery	Batterie	Batería	80 Ah
Alternatore	Alternator	Alternateur	Alternador	45 A
PNEUMATICI	TYRES	PNEUS	NEUMÁTICOS	
Tipo	Type	Type	Tipo	27 x 8.5" - 15
PESO OPERATIVO	OPERATING WEIGHT	POIDS OPERATIONNEL	PESO OPERACIONAL	1850 Kg.
DIMENSIONI	SIZES	DIMENSIONS	DIMENCIONES	
Altezza	Height	Hauteur	Altura	1900 mm.
Larghezza con pala	Width with bucket	Largeur avec godet	Ancho con cuchara	1250 mm.
Lunghezza con pala	Length with bucket	Longueur avec godet	Largo con cuchara	2905 mm.

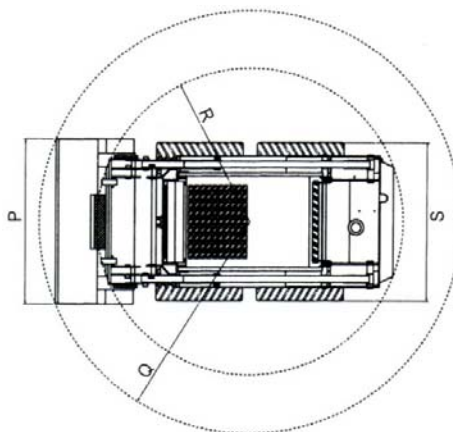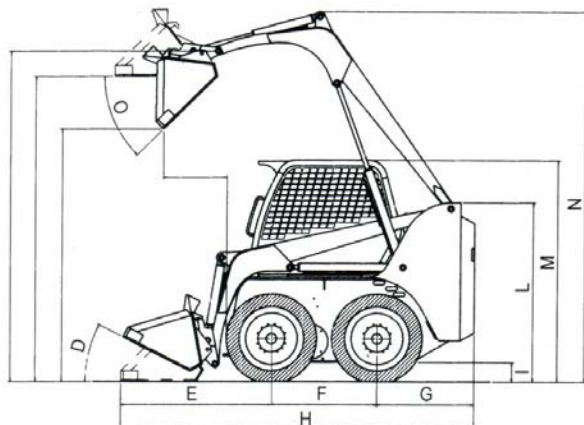

JOLLY 343 (mm)			
A	2750	I	190
B	2400	L	1460
C	2100	M	1900
D	27°	N	2850
E	2280	O	42°
F	865	P	1250
G	840	Q	1690
H	2905	R	1330
		S	1200



S.S. Trasimeno Ovest 161/c
06132 Perugia - Italy
Tel. +39 075 51801 - Fax +39 075 5179166
Web Site: www.officinapiccini.it
E-Mail: info@officinapiccini.it

Vendite Italia
Assistenza
Export Sales
Service

075 5180239
075 5180221
+39 075 5180240
+39 075 5180221

I dati contenuti in questo catalogo sono forniti a titolo indicativo. Il costruttore poi apportare in qualunque momento modifiche ai modelli descritti in questo catalogo, per ragioni di natura tecnica o commerciali. Le illustrazioni di questo documento non mostrano necessariamente il prodotto in versioni standard. Per ulteriori informazioni, il cliente è pregato di rivolgersi al più vicino Concessionario.
All the data in this catalogue are not binding the manufacturer in any way. The manufacturer can modify at any moment the machines shown in this catalogue for commercial or technical reasons. The pictures shown in this catalogue don't show only the standard versions of the products. For more detailed information please contact the nearest dealer.