



MS-5

PICKUP MACHINE



Specifications

Weight (approx)	20,700 lbs (9389 kg)
Capacity (max - theoretical)	1321 tph (1199 tonnes/hr)
Cummins QSB4.5 engine	160 hp @ 2200 rpm
Front tires (4)	18" x 6" (457 x 152 mm) solid
Rear tires (4)	8.25 x 15, 18-ply
Elevator	
Width	60" (1524 mm)
Bolt-on flights	6" x 4" x 1/2" (152 x 102 x 13 mm)
B1 roller chain	5.51" pitch
High alloy liners	3/8" (10mm)


Features

- Non-stop paving for windrow applications
- Production capacities to 1321 TPH
- Optimized elevator angle increases paver surge capacity
- Simple design lowers operating costs
- Fewer moving parts minimizes downtime
- Hydraulically driven, reversible elevator to clear obstructions
- Available hopper inserts improve paving efficiencies
- Railed walkway for safe, convenient operator service access

WORKS FOR YOU.™

SPECIFICATIONS

MS-5

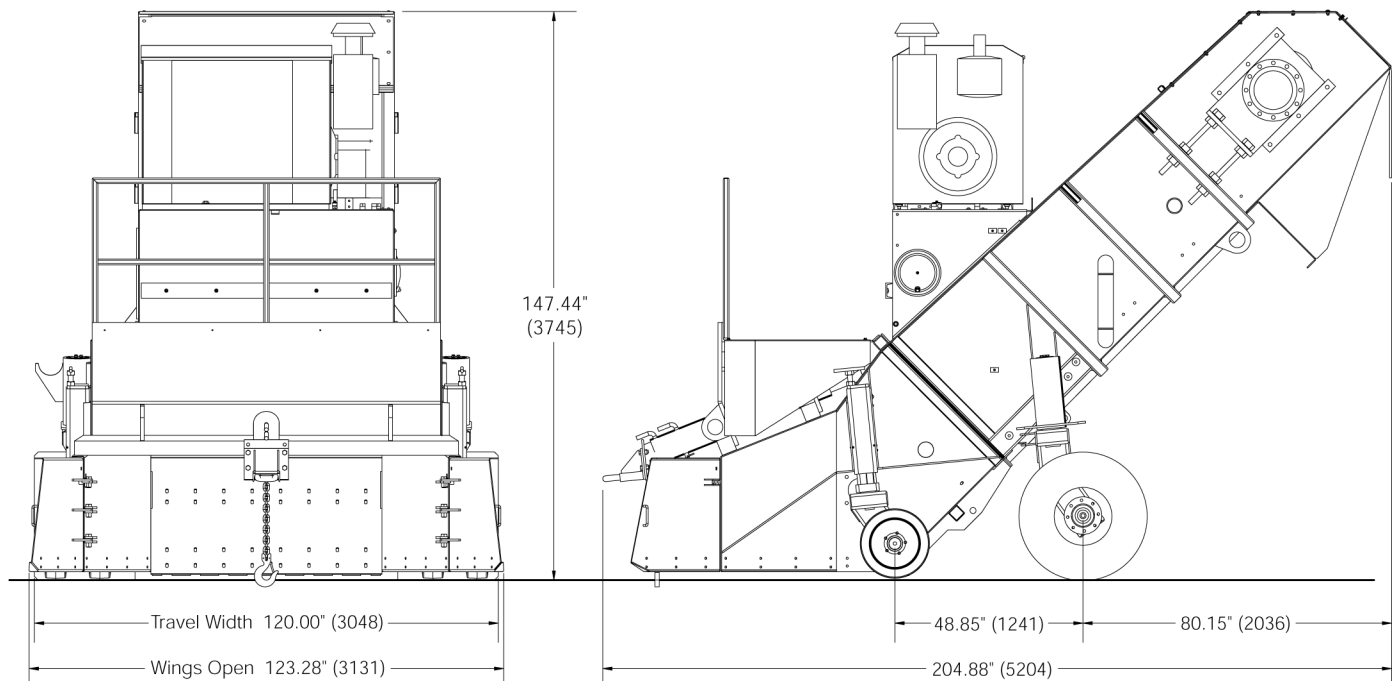

TEREX MS-5 PICKUP MACHINE

Designed for windrow paving techniques, the Terex MS-5 Pickup Machine eliminates the mat quality problems associated with "stop-and-go" paving. Attaching to a Terex® paver, the MS-5 allows continuous paving to produce the highest quality mat. The MS-5 features an increased elevator angle to optimize machine discharge height, improving the paver's surge capacity. A high capacity, reversible elevator delivers up to 1321 TPH productivity. Available hopper inserts improve paving efficiencies by expanding combined surge capacities and increasing material flow. This pickup machine's unique, dual wheel caster design ensures easy machine tracking and maneuverability. The Terex® MS-5 design is simple to help reduce maintenance costs and downtime for our customers.

STANDARD FEATURES

- Dual elevator roller chains with bolt-on flights
- Variable hydrostatic drive with two planetary gear boxes and drive motors on head shaft
- Cummins QSB4.5 engine
- Hydraulic leveling
- Dual position rear wheel caster pin lock
- High alloy floor liners
- Segmented head shaft sprockets
- Reversible elevator to clear obstructions
- Double seal on head shaft at gearbox
- Diesel spray-down system
- Super heavy-duty pivots, front and rear
- Solid rubber front tires, pneumatic rear tires
- Quick-tach, telescoping style, paver attachment
- Removable pintle hitch
- Elevator rear discharge hood removable for easy maintenance and service
- Engine instrumentation at ground level
- Engine access platform

OPTIONAL FEATURES

- 30' spray down hose reel
- Spare tire
- Night lighting package

www.terex.com

Effective Date: April, 2010. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. © 2010 Terex Corporation. Terex Corporation 200 Nyalala Farm Road, Westport, CT 06880 USA
Tel +1 203 222 7170 Fax +1 203 222 7976 www.terex.com



WORKS FOR YOU.™